



A Design Guide for Implementers and Reviewers

# Low Impact Development Manual for Michigan





# Low Impact Development Manual for Michigan: A Design Guide for Implementors and Reviewers

SEMCOG 2008

## Abstract

Low Impact Development (LID) is the cornerstone of stormwater management with the goal of mimicking a site's presettlement hydrology by using design techniques that infiltrate, filter, store, evaporate, and detain runoff close to its source. Because LID uses a variety of useful techniques for controlling runoff, designs can be customized according to local regulatory and resource protection requirements, as well as site constraints.

This manual provides communities, agencies, builders, developers, and the public with guidance on how to apply LID to new, existing, and redevelopment sites. The manual provides information on integrating LID from the community level down to the site level. It not only outlines technical details of best management practices, but also provides a larger scope of managing stormwater through policy decision, including ordinances, master plans, and watershed plans.

Funding for this project was made available by the Michigan Department of Environmental Quality through a grant from the U. S. Environmental Protection Agency. Preparation of this document may also be financed in part through grants from and in cooperation with the Michigan Department of Transportation with the assistance of the U.S. Department of Transportation's Federal Highway Administration and Federal Transit Administration; the Michigan Department of Natural Resources with the assistance of the U.S. Environmental Protection Agency; the Michigan State Police Office of Highway Safety Planning; and local membership contributions.

## **SEMCOG**

Southeast Michigan Council of Governments  
Information Center  
535 Griswold Street, Suite 300  
Detroit, MI 48226-3602  
313-961-4266 • fax 313-961-4869  
www.semcog.org • infocenter@semcog.org

Our Water. Our Future.





## Cover Photo Credits

Front cover (clockwise from top left):

1. Vegetated roof on East Hills Center, Grand Rapids, MI; Fishbeck, Thompson, Carr & Huber.
2. Cistern designed as a silo at Kresge Headquarters in Troy, MI; Conservation Design Forum, Inc.
3. Rain garden on former contaminated brownfield site in Grand Rapids, MI; Fishbeck, Thompson, Carr & Huber.
4. One of five rain gardens in the parking lot of the Macomb County Administration Building, Mt. Clemens, MI; Macomb County Planning and Economic Development.

Back cover (clockwise from top left):

1. Vegetated roof with recreational value on the parking deck for Blue Cross Blue Shield of Michigan, Detroit, MI; Turner Construction.
2. Bioretention area in planter box along Michigan Avenue, Lansing, MI; Tetra Tech.
3. One of 86 rain gardens that help manage stormwater runoff directly to the Au Sable River in Grayling, MI; Huron Pines.
4. The conversion of turf grass to native plantings in the Bennett Arboretum Wildflower Grow Zone, Edward Hines Park, MI; Wayne County Department of Environment.
5. System of bioretention areas designed to intercept parking lot runoff in Grand Rapids, MI; Fishbeck, Thompson, Carr & Huber.

## Acknowledgements

The development of a thorough manual on low impact development requires insight and expertise from a number of perspectives. The successful development of this manual would not have been possible without major contributions from a number of individuals. We would like to specifically thank the following individuals for their technical review of the manual.

Janis Bobrin, Washtenaw County Drain Commissioner's Office  
Andy Bowman, Grand Valley Metro Council  
Thomas Cahill, Cahill Associates  
Dana Calhoun, Hubbell, Roth & Clark, Inc.  
Don Carpenter, Lawrence Technological University  
Ron Cavallaro, Orchard, Hiltz & McCliment  
Brian Cenci, Fitzgerald Henne and Associates, Inc.  
Dan Christian, Tetra Tech  
Marcy Colclough, Southwest Michigan Planning Commission  
Tim Cullen, University of Michigan  
Keith Depp, City of Rochester Hills  
Scott Dierks, JFNew  
Donna DiNinno, UNI-Group USA  
Dave Drullinger, Michigan Department of Environmental Quality  
Tiffany Eichorst, Calhoun County Road Commission  
Sally Elmiger, Carlisle/Wortman Associates  
Shannan Gibb-Randall, InSite Design Studio, Inc.  
Jerry Hancock, City of Ann Arbor  
Aaron Harris, Michigan Concrete Association  
Mark Heiber, Harley Ellis Devereaux  
Chuck Hersey, SEMCOG  
Steve Holden, Michigan Department of Environmental Quality  
Wesley R. Horner, Cahill Associates  
Dan Hula, Hula Engineering  
Nina Ignaczak, Oakland County Planning and Economic Development Services  
Kelly Karll, Environmental Consulting & Technology, Inc.

Shawn Keenan, City of Auburn Hills  
Andrea Kevrick, InSite Design Studio, Inc.  
Ron Kinney, Road Commission for Oakland County  
Christine Kosmowski, City of Battle Creek  
Randy Lemoine, City of Grand Rapids/Symbiotic Ventures  
Lisa Lenfesty, Environmental Consulting & Technology, Inc.  
Brian Majka, JFNew  
Amy Mangus, SEMCOG  
Royce Maniko, Monroe County Planning Commission  
Charles Mills, Asphalt Association of Michigan  
Jennifer Muladore, Huron Pines Conservation District  
Patty O'Donnell, Northwest Michigan Council of Governments  
Noel Mullett, Wayne County Department of Environment  
Kristen O. Jurs, St. Clair County Health Department  
Todd Pascoe, Atwell Hicks  
Andy Potts, Cahill Associates  
Evan Pratt, Orchard, Hiltz & McCliment  
Angela Riess, SEMCOG  
Ralph Reznick, Michigan Department of Environmental Quality  
Judy Ruszkowski, Michigan Department of Transportation  
Gerard Santoro, Macomb County Planning and Economic Development Department  
Mark St. Charles, Green Oak Township  
Claire Schwartz, Fishbeck, Thompson, Carr & Huber, Inc.  
Lynne Seymour, Macomb County Public Works Office  
Susan Stefanski, SEMCOG  
Charles Taylor, Advanced Pavement Technology  
Dennis Wojcik, Washtenaw County Drain Commissioner's Office

We also extend our gratitude to those individuals who provided pictures and case study information for the manual. We have sourced each image with the appropriate company/organization's name. Where no source is given, the image or schematic is a SEMCOG or Cahill Associates graphic.

# Table of Contents

<b>Chapter 1: Introduction</b> . . . . .	1
<b>Chapter 2: Stormwater Management in Michigan: Why LID?</b> . . . . .	5
<b>Chapter 3: LID in Michigan: The Key Determinants</b> . . . . .	15
<b>Chapter 4: Integrating LID at the Community Level.</b> . . . . .	35
<b>Chapter 5: Incorporating LID into the Site Design Process.</b> . . . . .	49
<b>Chapter 6: Nonstructural Best Management Practices.</b> . . . . .	57
Cluster Development . . . . .	61
Minimize Soil Compaction . . . . .	69
Minimize Total Disturbed Area . . . . .	75
Protect Natural Flow Pathways . . . . .	83
Protect Riparian Buffer Areas . . . . .	89
Protect Sensitive Areas. . . . .	97
Reduce Impervious Surfaces . . . . .	107
Stormwater Disconnection . . . . .	115
<b>Chapter 7: Structural Best Management Practices.</b> . . . . .	121
Bioretention (Rain Gardens) . . . . .	131
Capture Reuse. . . . .	147
Constructed Filter . . . . .	157
Detention Basins . . . . .	169
Infiltration Practices . . . . .	193
Level Spreaders . . . . .	221
Native Revegetation . . . . .	229
Pervious Pavement with Infiltration. . . . .	241
Planter Boxes . . . . .	257
Riparian Buffer Restoration . . . . .	267
Soil Restoration . . . . .	281
Vegetated Filter Strip . . . . .	289
Vegetated Roof. . . . .	301
Vegetated Swale . . . . .	315
Water Quality Devices . . . . .	329
<b>Chapter 8: Implementing LID in Special Areas.</b> . . . . .	335
<b>Chapter 9: Calculations and Methodology.</b> . . . . .	357
<b>Chapter 10: Michigan LID Case Studies</b> . . . . .	387
<b>Appendix A: Statewide LID Committee.</b> . . . . .	399
<b>Appendix B: Glossary and List of Acronyms.</b> . . . . .	401
<b>Appendix C: Recommended Plant Lists for Best Management Practices</b> . . . . .	409
<b>Appendix D: Recommended Materials.</b> . . . . .	431
<b>Appendix E: Soil Infiltration Testing Protocol.</b> . . . . .	437
<b>Appendix F: Maintenance Inspection Checklists</b> . . . . .	445

**Appendix G: Stormwater Management Practices Maintenance Agreement** .....455  
**Appendix H: Model Ordinances**.....463  
    Model LID Stormwater Ordinance .....477

# Figures

Figure 2.1	Water Cycle	.5
Figure 2.2	Approximate annual water cycle for an undeveloped acre in Michigan	.6
Figure 2.3	Representative altered water cycle under the impervious parking lot	.6
Figure 3.1	Average Annual Precipitation in Michigan	.16
Figure 3.2	Rainfall Distribution by Storm Size for Lansing, Michigan based on Daily Precipitation Values from 1948 to 2007	.17
Figure 3.3	Average Annual Snowfall in Inches (1971 – 2000)	.17
Figure 3.4	Soil Freezing in Lower Michigan	.18
Figure 3.5	Michigan Bedrock Geology	.19
Figure 3.6	Michigan Surficial Geology	.20
Figure 3.7	Hydrologic Soils Group Classification	.21
Figure 3.8	Distribution of Hydrologic Soil Groupings (HSGs) in Michigan	.22
Figure 3.9	Dominant Soil Orders of Michigan	.23
Figure 3.10	Current Plant Communities of Michigan	.24
Figure 3.11	Ecoregions of Michigan	.25
Figure 3.12	Designated Trout Streams and Lakes	.27
Figure 3.13	Designated Natural Rivers	.28
Figure 5.1	LID Site Design Process	.50
Figure 6.1	LID Site Design Process	.57
Figure 6.2	Conventional development	.64
Figure 6.3	Clustered development	.64
Figure 6.4	Map of sensitive areas (top) and secondary resources (bottom)	.101
Figure 6.5	Five cul-de-sac options	.111
Figure 7.1	Structural BMP Selection Factors	.124
Figure 7.2	Chloride damaged white pines	.126
Figure 7.3	Residential Rain Garden	.133
Figure 7.4	Commercial Rain Garden	.133
Figure 7.5	Schematic of a small residential rain garden	.134
Figure 7.6	Schematic of a technically engineered bioretention area	.134
Figure 7.7	Trench drain and curb cut connected to bioretention area	.135
Figure 7.8	Curb cut into bioretention area/rain garden	.136
Figure 7.9	Positive Overflow Device: Domed riser at Macomb County Public Works Office	.136
Figure 7.10	Single-family residential lot drainage schematic	.136
Figure 7.11	Residential rain garden	.137
Figure 7.12	Tree planting detail	.137
Figure 7.13	Linear Bioretention Area along Roadway	.138
Figure 7.14	Bioretention area within parking lot	.138
Figure 7.15	Standard inlet to allow for overflow from the bioretention area	.138
Figure 7.16	Typical cistern components	.149
Figure 7.17	Vegetated peat filter adjacent to a parking lot	.159


Figure 7.18	Filter with infiltration to subsoils	159
Figure 7.19	Small subsurface filter	161
Figure 7.20	Large subsurface filter	162
Figure 7.21	Extended detention basin	177
Figure 7.22	Residential rain garden with surface connection to subsurface infiltration bed under garden	199
Figure 7.23	Schematic of infiltration basin	199
Figure 7.24	Cross-section of dry well with “sumped” catch basin for sediment pretreatment	200
Figure 7.25	Typical components of a berm	203
Figure 7.26	Infiltration basin sketch	205
Figure 7.27	Infiltration trench cross section	206
Figure 7.28	Schematic of subsurface infiltration bed cross section	207
Figure 7.29	A level spreader with a perforated pipe	223
Figure 7.30	Level spreader with inflow pipe	223
Figure 7.31	Native meadow species compared to turf grass	232
Figure 7.32	Example cross-section of porous asphalt system	243
Figure 7.33	Riverstone edge serves as a backup inlet into the infiltration bed under the porous asphalt	243
Figure 7.34	Porous asphalt being placed at the University of Michigan in Ann Arbor	244
Figure 7.35	Porous asphalt on open-graded stone subbase	244
Figure 7.36	Reinforced turf used as overflow parking	246
Figure 7.37	Slope stepping with berms	249
Figure 7.38	Example detail of an overflow device from a pervious asphalt system	249
Figure 7.39	Earthen berms separating terraced infiltration beds	251
Figure 7.40	Open-graded, clean, coarse aggregate for infiltration beds	252
Figure 7.41	Testing permeability with a high capacity hose	253
Figure 7.42	Schematic of Contained Planter Box	259
Figure 7.43	Schematic of Infiltration Planter Box	260
Figure 7.44	Schematic of Flow-through Planter Box	261
Figure 7.45	Schematic of a three-zone buffer	270
Figure 7.46	A Healthy Soil Profile	283
Figure 7.47	Compacted soil constrains movement of air and water	283
Figure 7.48	Diagram showing elements of a vegetated filter strip	291
Figure 7.49	Optional earthen berm at bottom of vegetated filter strip	292
Figure 7.50	A level spreading device (gravel-filled trench)	293
Figure 7.51	Concrete curb stop schematic	293
Figure 7.52	Sandy soils with HSG Group A	294
Figure 7.53	Sandy Loam soils with HSG Group B	294
Figure 7.54	Loam, Silt-Loam soils with HSG Group B	295
Figure 7.55	Sandy Clay Loam soils with HSG Group C	295
Figure 7.56	Clay Loam, Silty Clay or Clay soils with HSG Group D	296
Figure 7.57	Single media assembly	305
Figure 7.58	Dual media assembly	306

Figure 7.59	Schematics of Vegetated Swale with an underlying aggregate layer	317
Figure 7.60	Large Swale with subsurface storage	318
Figure 7.61	Slow discharge from porous pavement bed to vegetated swales.	319
Figure 7.62	Example of decreasing roughness (“n” value) with increasing flow depth.	323
Figure 7.63	Storage behind check dam.	323
Figure 7.64	Tray type insert	331
Figure 7.65	Catch basin insert showing basket frame	332
Figure 7.66	Sumped catch basin.	332
Figure 7.67	Example Hydrodynamic Devices	332
Figure 8.1	Alternative outfall BMP using rock berm and alternating strips of native vegetation	341
Figure 8.2	Mature rock berm and native vegetation filter berms	341
Figure 8.3	Tree planting detail	342
Figure 9.1.	Rainfall Distribution by Storm Size for Lansing, MI based on Daily Precipitation Values from 1948-2007. The two-year, 24-hour storm is 2.42 inches.	359
Figure 9.2	Climatic Zones for Michigan.	370
Figure C.1	Planting Zone/BMP Matrix.	409
Figure C.2	EPA Level III Ecoregions for Michigan	410
Figure G.1	Plan View of Stormwater Practices	460

## Tables

Table 2.1	Pollutant Removal Table (in percentages)	8
Table 2.2	Summary of Cost Comparisons Between Conventional and LID Approaches.	12
Table 3.1	Rainfall Event Totals of 24-Hour Duration in Michigan	15
Table 3.2	Hydrologic Soil Groups	21
Table 3.3	Representative Cation Exchange Capacities in Surface Soils	24
Table 3.4	Michigan Rivers and Stream Miles not Supporting Designated Uses Listed by Cause of the Impairment	30
Table 4.1	Community good housekeeping practices	41
Table 4.2	Entities with Stormwater Jurisdiction	46
Table 6.1	Data Sources for Environmentally Sensitive Areas	99
Table 6.2	Narrow residential street widths	110
Table 6.3	Fire Vehicle Street Requirements	110
Table 6.4	Cul-de-sac turning radii	111
Table 6.5	Example minimum parking ratios.	112
Table 7.1	BMP Summary Matrix	122
Table 7.2	Cold Climate Design Challenges	126
Table 7.3	Additional BMP considerations for cold climate use	128
Table 7.4	Setback distances	140
Table 7.5	Round cistern capacity (Gallons)	152
Table 7.6	Household water demand chart.	152
Table 7.7	Annual rainfall yield (in gallons) for impervious surfaces	154
Table 7.8	Pollutant removal efficiencies for sand filters.	165

Table 7.9	Definitions of Wetland Vegetation Zones . . . . .	181
Table 7.10	Pollutant removal efficiencies by detention facility . . . . .	182
Table 7.11	Setback Distances . . . . .	201
Table 7.12	Stormwater Functions by Infiltration BMP Type . . . . .	209
Table 7.13	Definition of Infiltration Area for Infiltration BMPs. . . . .	210
Table 7.14	Tree spacing per acre. . . . .	276
Table 7.15	Bulk Densities for Soil Textures . . . . .	284
Table 7.15	Recommended Length as a Function of Slope, Soil Cover . . . . .	293
Table 7.16	Vegetated roof types . . . . .	304
Table 7.17	Values of Manning’s Roughness Coefficient n (Uniform Flow). . . . .	321
Table 7.18	Permanent stabilization treatments for various ditch grades. . . . .	322
Table 7.19	Permissible flow velocities to minimize erosion . . . . .	322
Table 7.20	Cost comparison showing vegetated swale to pipe, curb, and gutter . . . . .	325
Table 8.1	Pollutants and Sources in Highway Runoff . . . . .	337
Table 8.2	Pre-Treatment Options for Stormwater Hot Spots . . . . .	354
Table 8.3	Minimum Pre-Treatment Options. . . . .	355
Table 9.1	90 Percent Nonexceedance Storm Values . . . . .	362
Table 9.2	Commonly used curve numbers (CNs) from TR-55. . . . .	364
Table 9.3	Runoff Coefficients for the Small Storm Hydrology Method. . . . .	366
Table 9.4	Rainfall Events of 24-Hour Duration in Michigan . . . . .	370
Table 9.5	Pollutant removal efficiencies for various stormwater BMPs. . . . .	373
Table E.1	Sample Percolation Rate Adjustments . . . . .	442
Table H.1	BMP Credits. . . . .	486
Table H.2	Pre-Treatment Options for Stormwater Hot Spots . . . . .	488
Table H.3	Minimum Pre-Treatment Options . . . . .	488

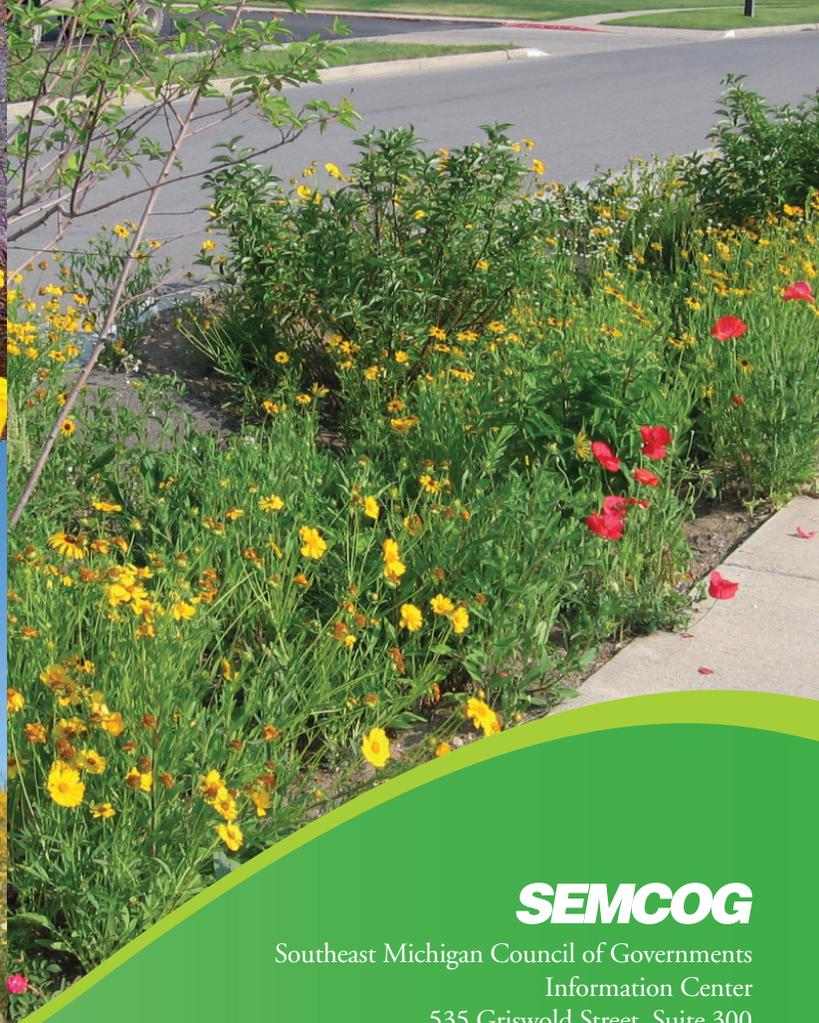

## **SEMCOG**

Southeast Michigan Council of Governments  
Information Center  
535 Griswold Street, Suite 300  
Detroit, MI 48226-3602  
313-961-4266 • fax 313-961-4869  
[www.semco.org](http://www.semco.org) • [infocenter@semco.org](mailto:infocenter@semco.org)

This project was funded by the Michigan Department of Environmental Quality through a grant from the U.S. Environmental Protection Agency.